

La carte SIM


SIM STRUCTURE
VPP
I/O
Optional Pad
for USB
Optional Pad
for USB
GND
Clock
Reset
VCC

SIM CARD PINOUT

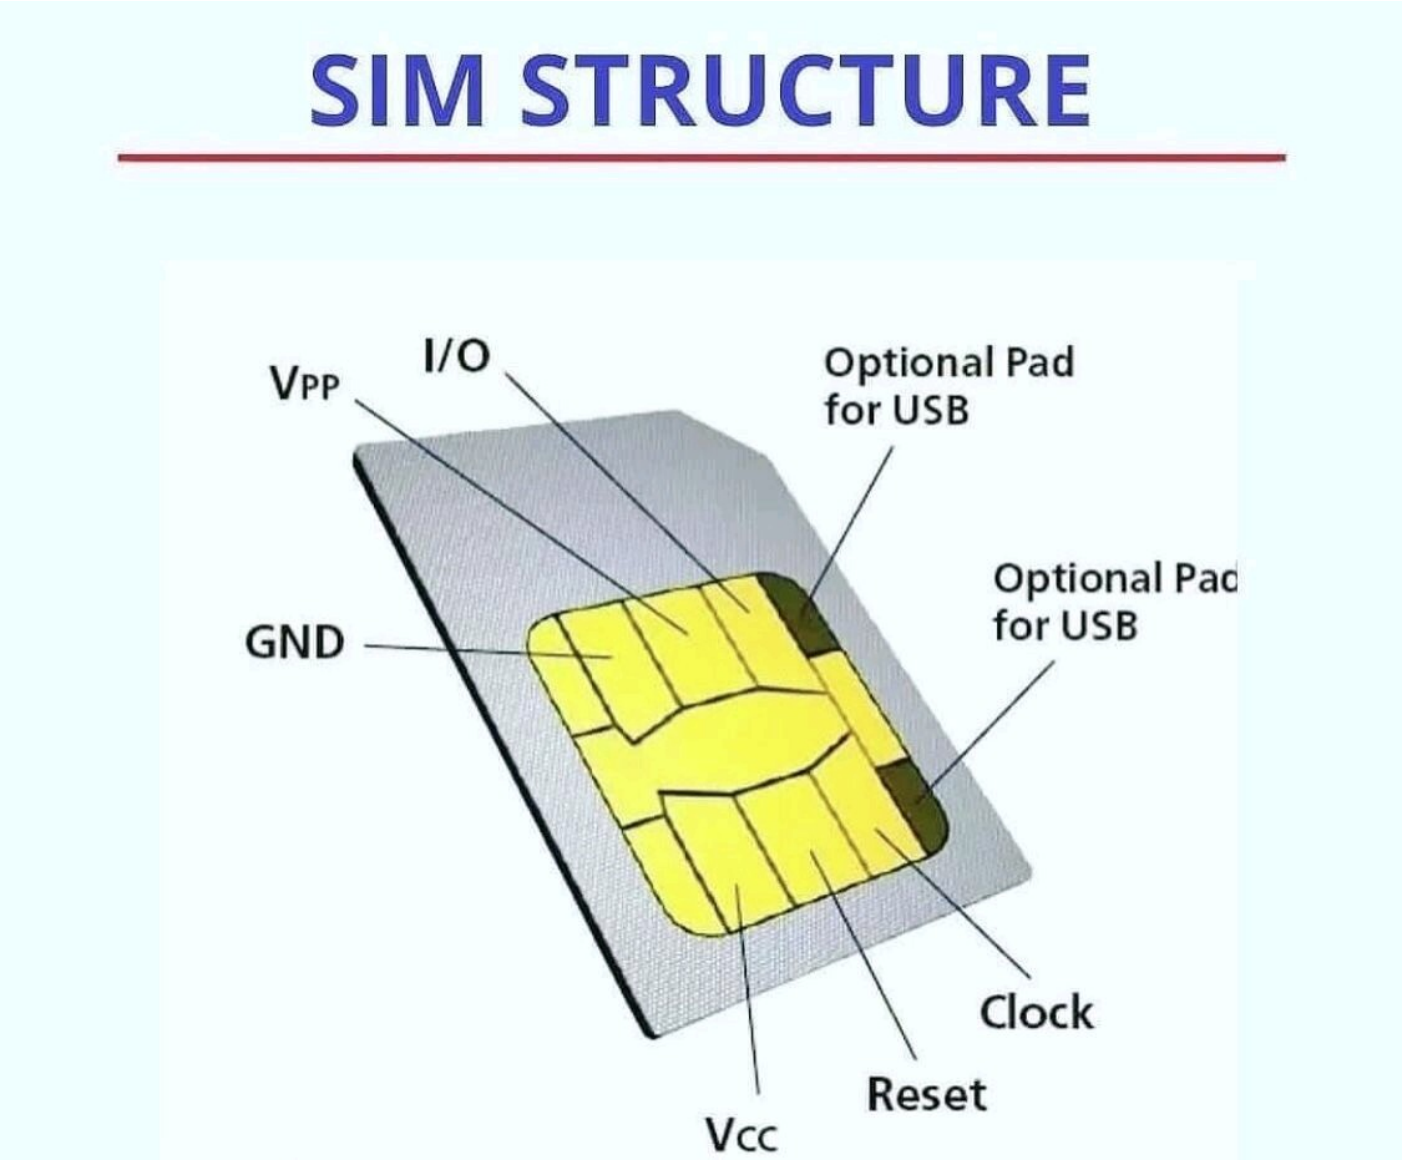

Mini-SIM Smart card

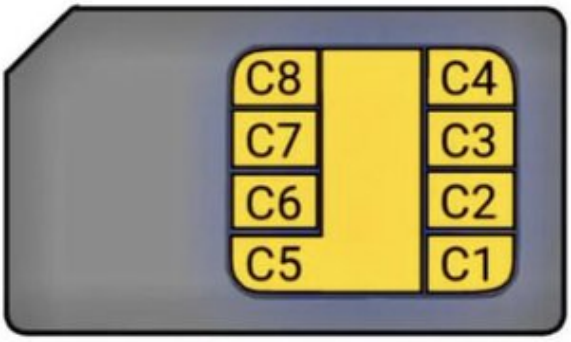

circuitmix

Pin	Signal	Description
C1	VCC	VDC power supply input
C2	RESET	Reset signal. Supplied from the interface device or in combination with an internal control circuit
C3	CLOCK	Clock signal for serial data
C4	RESERVED	AUX1 (optional)
C5	GND	Ground
C6	VPP	Programming voltage input (optional). Required to program the internal non-volatile memory
C7	DATA	I/O for serial data
C8	RESERVED	AUX2 (optional)

AUX pin are optionally used for USB interfaces or other application specific uses.

Revision #2
Created 2022-01-11 14:52:43 UTC by Admin
Updated 2024-08-18 10:04:27 UTC by Admin